

# EQUINOX

## DJ Booth Overhead Kit (EQLED12E)

Supplied with: Dual height uprights, Heavy duty lighting bar and fixing bolts, 4 x Upright clamps, Carry bag.

Note: Two person assembly recommended. To aid assembly use lightweight grease on spigot joints



1. Unfold the DJ Booth System (EQLED12).


2. Position uprights to the rear of the DJ Booth System. Optional upright extensions are included to extend to 2.65m.



3. Attach the uprights to the stand using clamps to each side of the DJ Booth System. The upright clamps should be located towards the lower section (left) and upper section (right) of the DJ Booth System.




angle lever bolt

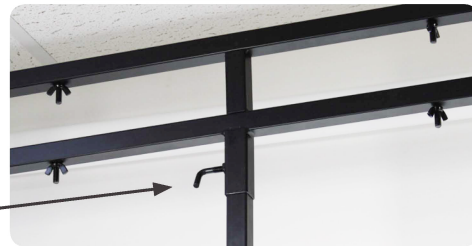

4. Connect the two lighting bar sections together and attach to the uprights. The lighting bar can be secured to the uprights using the included angle lever bolts.

5. Secure lighting using bolts and wing nuts supplied or using 25mm clamps (CLAM08 not supplied). Secondary fixings may be required, if applicable use suitable safety bond wires (CLAM20 or CLAM03 not supplied).



2.55m



2.1m:  
Max. load weight: 45kg  
evenly distributed.

9 upper and 9 lower  
fixture location points.

(Extendable to 2.65m:  
Max. load weight: 35kg  
evenly distributed.)